

ADDENDUM NO. 1

to **CONTRACT DOCUMENTS** for

Lawnridge Park – Pickleball and Basketball
Courts; Project No. LB6189
Grants Pass, Oregon 97526

To All Plan Holders:

The following changes, additions, and/or deletions are hereby made a part of the Contract Documents for the construction of the Lawnridge Park – Pickleball and Basketball Courts, Project No. LB6189, Grants Pass, Oregon, as fully and completely as if the same were fully set forth therein:

1. ON THE CONSTRUCTION PLANS...

- On Page 2 of 4; At the SW Corner of Plans where it says, “Existing 48” Sequoia Tree” take special care to protect tree. No parking or storing materials on or around tree.
- On page 3 of 4; Under Pickleball Court Notes where 6’ fencing is referenced, change to 8’.

2. IN THE CONTRACT DOCUMENTS...

Bid Proposal - Bid Schedule: - The following bid items have been revised, removed, or added.

13	Retaining Wall with Footing , concrete retaining wall and footing, per approved plans and APWA/ODOT Section 00759. Includes excavation, backfill installed complete.			
	180	SF	\$	\$
17	Basketball Court Surfacing and Striping , per approved plans, and Special Provisions, Section 01095.40. Installed complete.			
	1	LS	\$	\$
18	Basketball Court Backboard and Rim , per approved plans. Installed complete.			
	1	LS	\$	\$

Note: Bid items 13, 17 and 18: THESE HAVE BEEN REMOVED.

3. CLARIFICATIONS...

Revised Bid Schedule is THREE pages.

- Concrete Mono Pour is approved.
- Basketball Courts and Retaining wall; Items 13, 17 and 18 have been removed from the project, as the basketball courts recently were redone.
- Landscaper to design Lawn area, and sprinkler system.
- A Comparable product to Plexi-Pave to be considered with technicians approval.
- Trees can be Ground where necessary
- Existing Sequoia Tree on page 2 of 4 at SE corner of plans is to be protected. No parking equipment or storing materials on or around it.
- There are only 2 trees to remove, not 3. One has already been removed.
- Existing Light Poles are to be used for the relocations.
- On page 2 of 4; the "Top Soil to Grade" Quantity Estimate is: 62 c.y.
- All Fencing referenced at 6' is to be changed to 8'.
- Included in addendum is Light Pole Foundation Detail sheet, see final page of addendum.
- Fence quantities are:
 - 4' Green vinyl coated chain link fence between 2 Pickleball Courts: approx. 34'
 - 8' Green vinyl coated chain link fence in other areas indicated on plans: Approx: 241'
 - 5 Gates.

ATTACHED ARE THE FOLLOWING:

- **REVISED PAGES OF THE BID SCHEDULE (3 PAGES)**
- PLEASE NOTE THAT BID ITEMS HAVE BEEN **RE-NUMBERED**

PLEASE USE THESE REPLACEMENT PAGES WHEN SUBMITTING YOUR BID.

All Bidders shall acknowledge receipt and acceptance of this Addendum No. 1 by signing in the space provided and submitting the signed Addendum with the bid. Bids submitted without this Addendum will be considered irregular and may not be accepted.

RECEIPT OF THIS ADDENDUM IS ACKNOWLEDGED AND CONDITIONS ARE HEREBY

AGREED TO THIS _____ DAY OF _____ 2022.

Bidder's Name (Company)

BY: _____
(Signature)


END OF ADDENDUM NO. 1

BID SCHEDULE
Lawnridge Park-Pickleball and Basketball Courts
LB6189

PART 00200 – TEMPORARY FEATURES AND APPURTENANCES				
Item	Quantity	Unit	Unit Price (Fig.)	Extended Amount
1	Mobilization , move in of equipment and materials per APWA/ODOT Sec. 00210, complete.			
	1	LS	\$	\$
2	Work Zone Traffic Control, includes TCD, TCM and TCP per approved plans, M.U.T.C.D., and APWA/ODOT Sec. 00225 and 00225.90 (b), complete.			
	1	LS	\$	\$
3	Erosion & Sediment Control , per approved plans and APWA/ODOT Sec. 00280.00 Inlet Protection, Dust Control, Sediment Fence, Biofilter Bags, installed complete.			
	1	LS	\$	\$
4	Construction Staking , lay out and set construction stakes and marks to establish the lines, grades, and slopes necessary for project completion, per Special Provisions Sec. 00150.15 (c).			
	1	LS	\$	\$
PART 00300 – ROADWORK				
5	Removal of Structures and Obstructions , includes removal and proper disposal of existing pipe, AC, fence, posts and sidewalk and saw cutting or other methods of cutting pavement, per approved plans and APWA/ODOT Sec. 00310.and 00291.20(c), (Hazardous Waste), complete.			
	1	LS	\$	\$
6	Clearing and Grubbing , per approved plans and APWA/ODOT Sec. 00320, including all vegetation, trees. Also included is air/pneumatic soil excavation to be performed by an ISA arborist.			
	1	LS	\$	\$
7	General Earthwork (Pickleball Court, Excavation) , per approved plans and APWA/ODOT Section 00330.			
	1	LS	\$	\$
PART 00600 – BASES				
8	Aggregate Base Course (Pickleball Court) , 8" thickness of ¾"-0 aggregate, compacted in place, per approved plans and APWA/ODOT Section 00640, 00641 and 02630. Installed complete.			
	210	TN	\$	\$

PART 00700 – WEARING SURFACES				
9	Asphalt Pavement (Pickleball Court), 3” compacted thickness, two lifts, per Special Provisions Section 01095.30. Includes sawcutting for crack control and elastomeric crack sealant. Installed complete.			
	103	TN	\$	\$
10	Concrete Sidewalk (Match Existing), per approved plans, GP720 and APWA/ODOT Sec. 00759. Includes excavation, backfill, installed, complete.			
	2,273	SF	\$	\$
PART 00900 – PERMANENT TRAFFIC CONTROL AND ILLUMINATION SYSTEMS				
11	Relocate Existing Lighting, per approved plans, APWA/ODOT Sections 00960 and 00962. Includes trenching, conduit, wiring, junction box, new LED lights, relocate existing pole, base and appurtenances per plans. Installed, complete.			
	2	EA	\$	\$
PART 01000 – RIGHT OF WAY DEVELOPMENT AND CONTROL				
12	Install Green Vinyl Chain Link Fencing for Pickleball and Basketball Courts, Install green vinyl chain link fence, per approved plans and APWA/ODOT Section 01050. Installed, complete.			
	1	LS	\$	\$
13	Concrete Edging, concrete edging, per approved plans and APWA/ODOT Section 00759. Includes excavation, backfill installed complete.			
	155	LF	\$	\$
14	Pickleball Court Posts and Nets, per approved plans. Installed complete.			
	1	LS	\$	\$
15	Pickleball Court Surfacing and Striping, per approved plans, and Special Provisions, Section 01095.40. Installed complete.			
	1	LS	\$	\$
16	Benches, per approved plans. Installed complete.			
	4	EA	\$	\$
17	Bicycle Parking Rack, per approved plans. Installed complete.			
	1	EA	\$	\$
18	New Frontier “Ulmas Frontier” Tree, 6’ Height with 1.5” Caliper, per approved plans, landscape documents and specifications, and APWA/ODOT Section 01030 and 01040. Installed complete and established.			
	1	LS	\$	\$

19	Landscape and Irrigation , design build for turf irrigation, per approved plans, and APWA/ODOT Sections 01040 and 01120. Installed complete.		
1	LS	\$	\$
PART 00200 – TEMPORARY FEATURES AND APPURTENANCES			\$
PART 00300 – ROADWORK			\$
PART 00600 – BASES			\$
PART 00700 – WEARING SURFACES			\$
PART 00900 – PERMANENT TRAFFIC CONTROL AND ILLUMINATION SYSTEMS			\$
PART 01000 – RIGHT OF WAY DEVELOPMENT AND CONTROL			\$
SUM OF EXTENDED TOTALS			\$
CONTRACTOR SIGNATURE:			
DATE:			

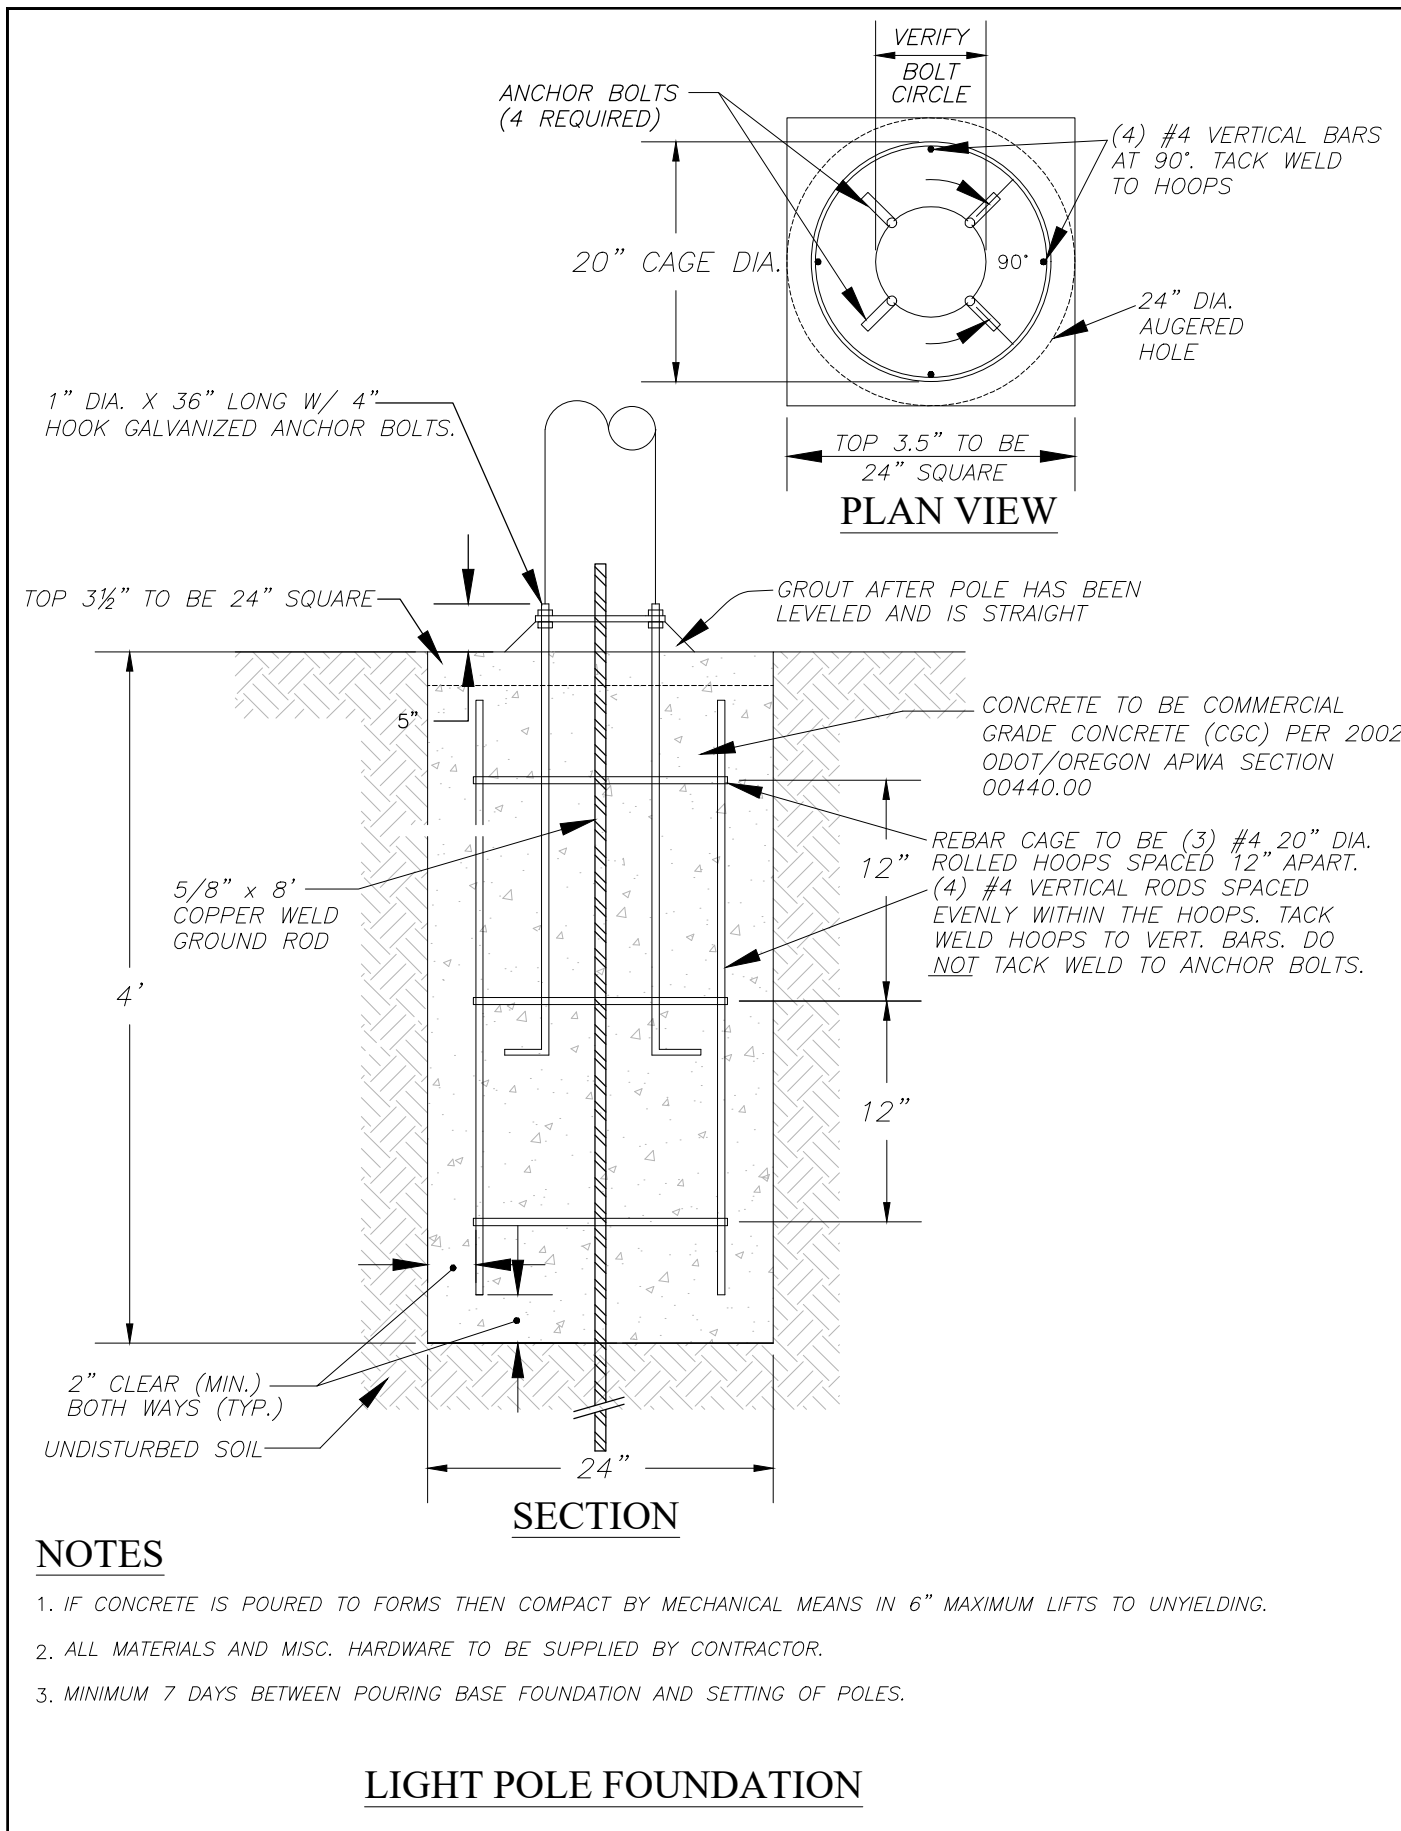

NOTES

1. IF CONCRETE IS POURED TO FORMS THEN COMPACT BY MECHANICAL MEANS IN 6" MAXIMUM LIFTS TO UNYIELDING.
2. ALL MATERIALS AND MISC. HARDWARE TO BE SUPPLIED BY CONTRACTOR.
3. MINIMUM 7 DAYS BETWEEN POURING BASE FOUNDATION AND SETTING OF POLES.

LIGHT POLE FOUNDATION